




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 12/56		(11) International Publication Number: WO 98/59470
A2		(43) International Publication Date: 30 December 1998 (30.12.98)
(21) International Application Number: PCT/SE98/01217 (22) International Filing Date: 23 June 1998 (23.06.98) (30) Priority Data: 9702385-7 23 June 1997 (23.06.97) SE (71) Applicants (for all designated States except US): TELEFON- AKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). TELIA AB [SE/SE]; S-123 86 Farsta (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): KANTER, Theo [NL/SE]; Rönninge skolväg 35E, S-144 62 Rönninge (SE). FOGEL- HOLM, Rabbe [SE/SE]; Turevägen 54 B, S-191 47 Sollen- tuna (SE). (74) Agents: HERBJØRNSSEN, Rut et al.; Albihns Patentbyrå Stockholm AB, P.O. Box 3137, S-103 62 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published Without international search report and to be republished upon receipt of that report.

(54) Title: METHOD AND APPARATUS TO ENABLE A FIRST SUBSCRIBER IN A LARGER NETWORK TO RETRIEVE THE ADDRESS OF A SECOND SUBSCRIBER IN A VIRTUAL PRIVATE NETWORK

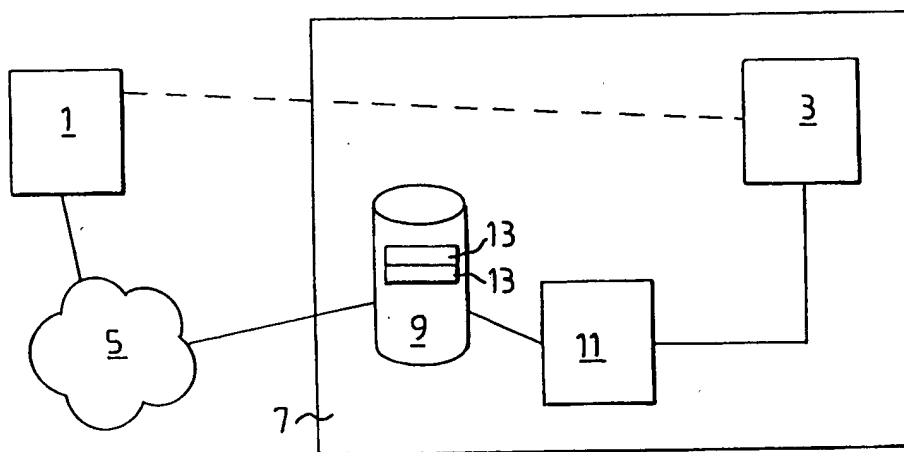

(57) Abstract

The present invention relates to an apparatus and a method for use in a virtual private network, VPN, (7, 7'), or a network domain forming part of a larger network, such as the Internet, to enable a first subscriber (1; 1') in the larger network to retrieve the address of a second subscriber (3; 3') in the VPN. The address may be returned to the first subscriber (1; 1') or a connection means (11) may set up the connection between the subscribers (1, 3; 1', 3') automatically.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD AND APPARATUS TO ENABLE A FIRST SUBSCRIBER IN A LARGER NETWORK TO RETRIEVE THE ADDRESS OF A SECOND SUBSCRIBER IN A VIRTUAL PRIVATE NETWORK

Technical Field

The present invention relates to the communication between terminals connected to
5 data or multimedia networks, such as the Internet.

Background

Internet Protocol (IP) type networks are used to an increasing degree for data, video
and audio communication. It is a problem for subscribers in such networks to find
10 the physical addresses, or IP addresses, of subscribers in other networks or
subnetworks.

Summary of the Invention

It is an object of the present invention to enable a subscriber in any part of an IP
15 based network to locate other subscribers in the same or other parts of the IP based
network.

It is another object of the invention to enable subscribers in any part of an IP based
network to connect to other subscribers in the same or other parts of the IP based
20 network, for any kind of communication according to any known protocol.

It is yet another object of the invention to enable a subscriber to move between
different locations in the network and still be reached.

25 The objects are achieved in a network by using a name server means according to
the invention for each Virtual Private Network (VPN) connected to the network, the
name server means being adapted to
- resolve a logical address in the VPN to the real IP address of hosts and user
terminals for a specific service, such as e-mail or communication according to the
30 H.323 protocol,

- function as a look-up table between the logical E.164 addresses in the VPN and the real IP addresses of the hosts and users
- cooperate with connection means for call set-up.

- 5 The solution according to the invention offers the following advantages:
- As it is based on known solutions, it may be implemented at a relatively low cost.
- It involves the separation of an internal and an external number plan, thus increasing the flexibility in the network.
- It enables the connection between an H.323 domain and an Internet domain.

10

Brief Description of the Drawings

Figure 1 is a schematic drawing of a connection between two user terminals set up according to a first embodiment of the invention.

- 15 Figure 2 is a flow chart of the actions performed when a connection between two user terminals is set up according to the first embodiment.

Figure 3 is a schematic drawing of a connection between two subscribers set up according to a second embodiment of the invention.

- Figure 4 is a flow chart of the actions performed when a connection between two
- 20 user terminals is set up according to the second embodiment.

Detailed Description of Embodiments

- The dotted line in Figure 1 shows a connection between a first 1 and a second 3 user terminal. The terminals 1, 3 may be any kind of terminals which may be used for
- 25 communication, for example personal computers (PCs) or telephones. The first user terminal 1 is connected to a data or telecommunications network 5 via a leased line, a modem a corporate network, or in any other way. The network 5 may be any network allowing communication between two end points on a logical connection, which may be packet switched or circuit switched. A common network today, in
- 30 which the teachings of the invention may become particularly useful, is the Internet.

In the following discussion, therefore, the network 5 will be referred to as the Internet.

The second user terminal is found in a Virtual Private Network (VPN) 7, which
5 functions as an Internet domain. A name server 9 in the VPN 7 is connected to the Internet 5 and to a connection unit 11. In TCP/IP networks the name server 9 might be a Domain Name Server (DNS) well known in the art. If the H.323 protocol for data, audio and video communication is used, the connection unit 11 might be a gatekeeper, of a kind well known in the art. The connection unit 11 is connected to
10 the second user terminal 3 with a semi-permanent connection.

The name server 9 is a database comprising, in addition to the information found in prior art name servers, an MX record 13 for each user terminal in the VPN 7. The MX record comprises information about the IP addresses of all user terminals in the
15 VPN 7 for different types of communication, for example, e-mail, H.323, or telnet connections.

Figure 2 shows the actions taken when the first user 1 in the first embodiment wishes to establish a connection to the second subscriber 3.

20

Step S11: The first user 1 connects to the name server 9 and requests the gate number for H.323 and enters the known address of the second user 3.

25

Step S12: The name server 9 determines what type of connection is wanted and forwards the request to the connection unit 11, together with the address of the first user 1.

30

Step S13: The connection unit 11 retrieves the appropriate IP address of the second user 3 for the type of connection, in this case, the H.323 address. The type of connection may be determined, for example, by the port of the name server at which the connection is made.

Step S14: The connection unit 11 establishes the connection between the users 1, 3.

5 Figure 3 shows a second embodiment of the invention. In this embodiment a first user terminal 1' is connected to a second user terminal 3' as shown by the dotted line. The second user terminal is found in a VPN 7', which also comprises a name server 9', identical to the name server 9 in Figure 1. A user directory 11' is connected to the name server 9'. The user directory 9' comprises information about
10 the physical addresses of the user terminals 3' in the VPN 7'. In a TCP/IP network, the name server will be a Domain Name Server (DNS) and the user directory will be a Lightweight Directory Access Protocol (LAPD) server of the kinds known in the art.

15 Figure 4 shows the actions taken when the first user 1' in the second embodiment wishes to establish a connection to the second subscriber 3'.

Step S21: The first user 1' connects to the name server 9' and transmits the known, logical address of the second user 3' to the name server 9'.

20

Step S22: The name server 9' determines what type of connection is wanted and forwards the logical address of the second user 3' to the user directory 11' of the VPN 7'.

25 Step S23: The user directory 11' retrieves the physical address corresponding to the logical address entered.

Step S24: The user directory 11' returns the physical address of the second user 3' to the first user 1' via the name server 9'.

30

Step S25: The first user 1' initiates the connection to the second user 3' in a conventional manner.

If the first user 1' knows the address to the user directory 11', he can go directly to the user directory 11' instead of connecting via the name server 9'.

Claims

1. A name server means (9; 9') for use in a virtual private network (7; 7'), or a network domain, forming part of a compound network,
- 5 said means (9; 9') being characterized by means (13; 13') for receiving a request for the physical address of a user terminal (3; 3') from another user terminal (1; 1') and forwarding said request to a connection means (11; 11') in the virtual private network (7; 7') or network domain.
- 10 2. A name server means according to claim 1, characterized in that the logical addresses comprise IP addresses, addresses according to the E.164 protocol and/or other logical identities according to the appropriate numbering plan.
3. A name server means according to claim 1 or 2, characterized by means (11; 11')
- 15 for initiating the connection between two subscribers (1, 3).
4. A connection means (11; 11') for use in a virtual private network (7; 7') or a network domain, forming part of a compound network, said connection means being characterized in that it is adapted to return, upon a request comprising a logical
- 20 address of a user (3; 3') in the virtual private network (7; 7'), a physical address of said user (3; 3').
5. A connection means (11; 11') according to claim 4, characterized in that it is adapted, upon a request originating from a user (1; 1') in said compound network,
- 25 said request comprising a logical address of a user (3; 3') in the virtual private network (7; 7'), to establish a connection between said users (1, 3; 1' 3').
6. A telecommunications or data communications network, forming part of a compound network, characterized by at least one connection means, according to
- 30 claim 4 or 5.

7. A network according to claim 6, characterized by at least one name server means according to any one of claims 1-3.

5 8. A method for enabling a user (1; 1') in compound network to retrieve the IP address of a second user (3; 3') in a virtual private network (7; 7') or a network domain, forming part of said compound network,

characterized by the following steps:

- transmitting a request for a physical address, the request comprising a logical
10 address of the second user (3; 3')
- forwarding the logical address of the second user (3; 3') to a connection means (11);
- returning the logical address to the first user (1; 1') or automatically establishing a connection between the first (1; 1') and the second (3; 3') user.

15

9. A method according to claim 8, characterized by

- automatically establishing a connection between the first (1) user and the second user (3).



20 10. A method according to claim 8, characterized by

- returning the address of the second user (3') to the first user (1').

11. A method according to any one of claims 8-10, characterized by determining the type of address to be used in dependence of the port of the name server (9; 9') on
25 which the request was received.

12. A method according to any one of claims 6-11, characterized in that the physical address may be an e-mail-address, and/or an E.164 address.

1/2

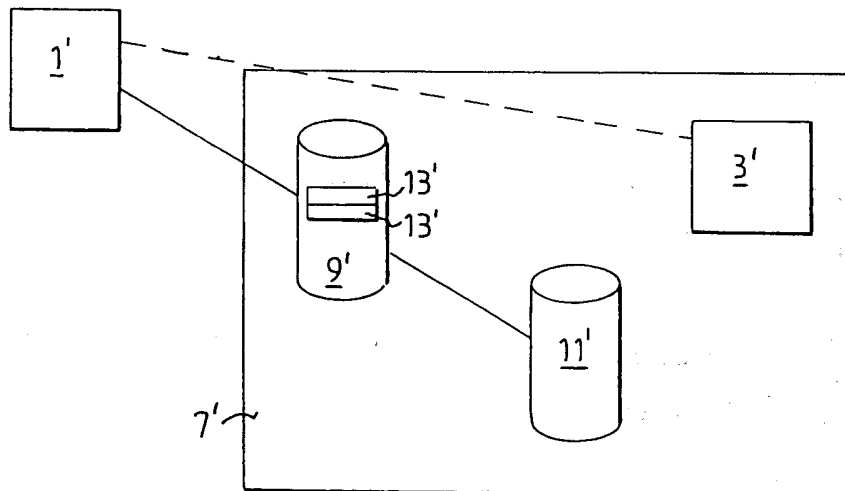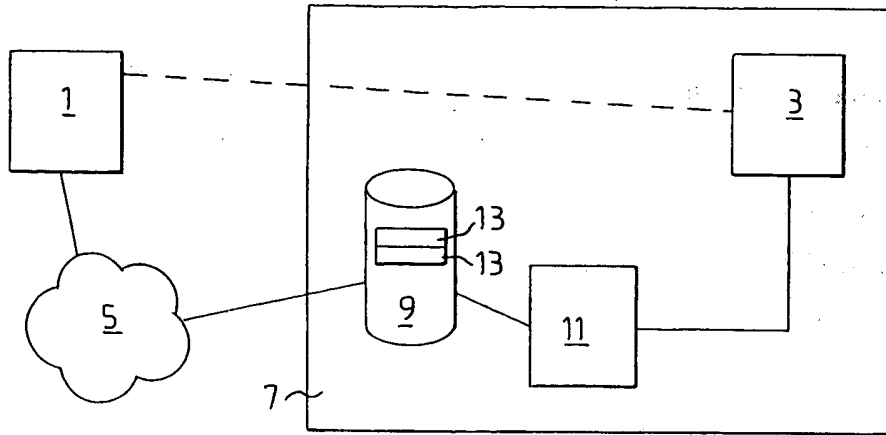

2 / 2

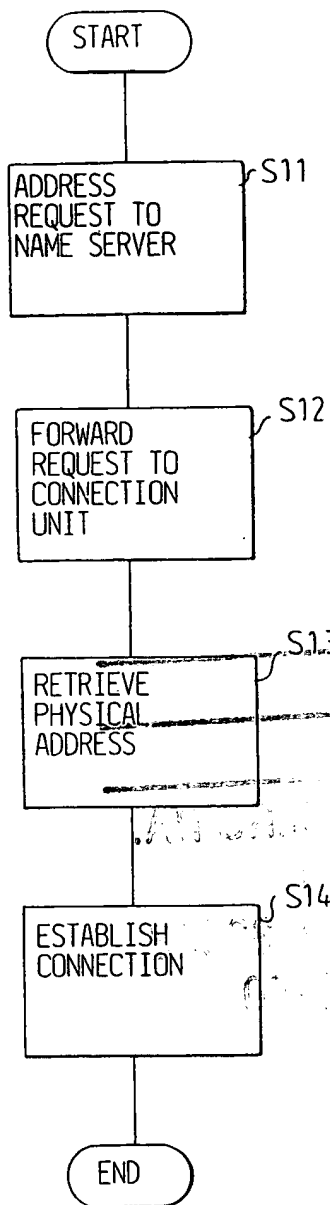


FIG. 2

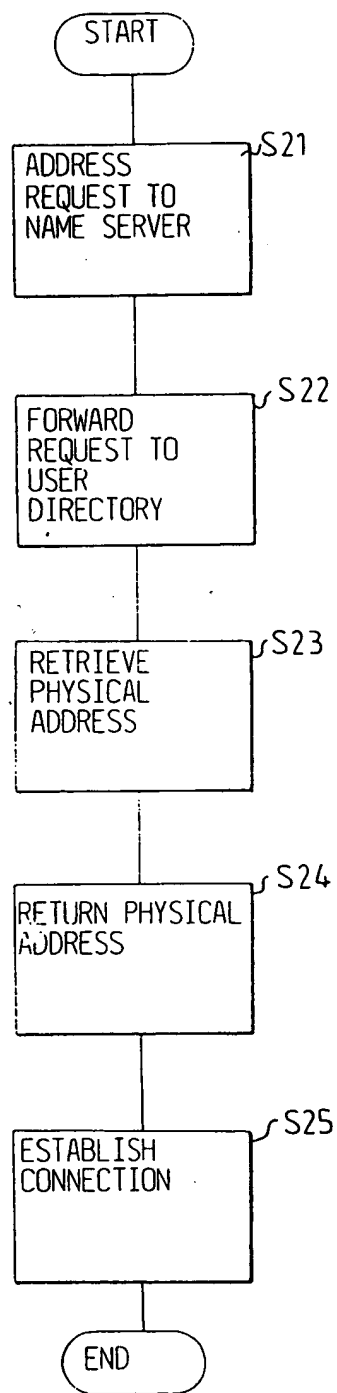


FIG. 4

DOCKET NO: A-2875

SERIAL NO: _____

APPLICANT: Edelbert König

LERNER AND GREENBERG P.A.

P.O. BOX 2480

HOLLYWOOD, FLORIDA 33022

TEL. (954) 925-1100